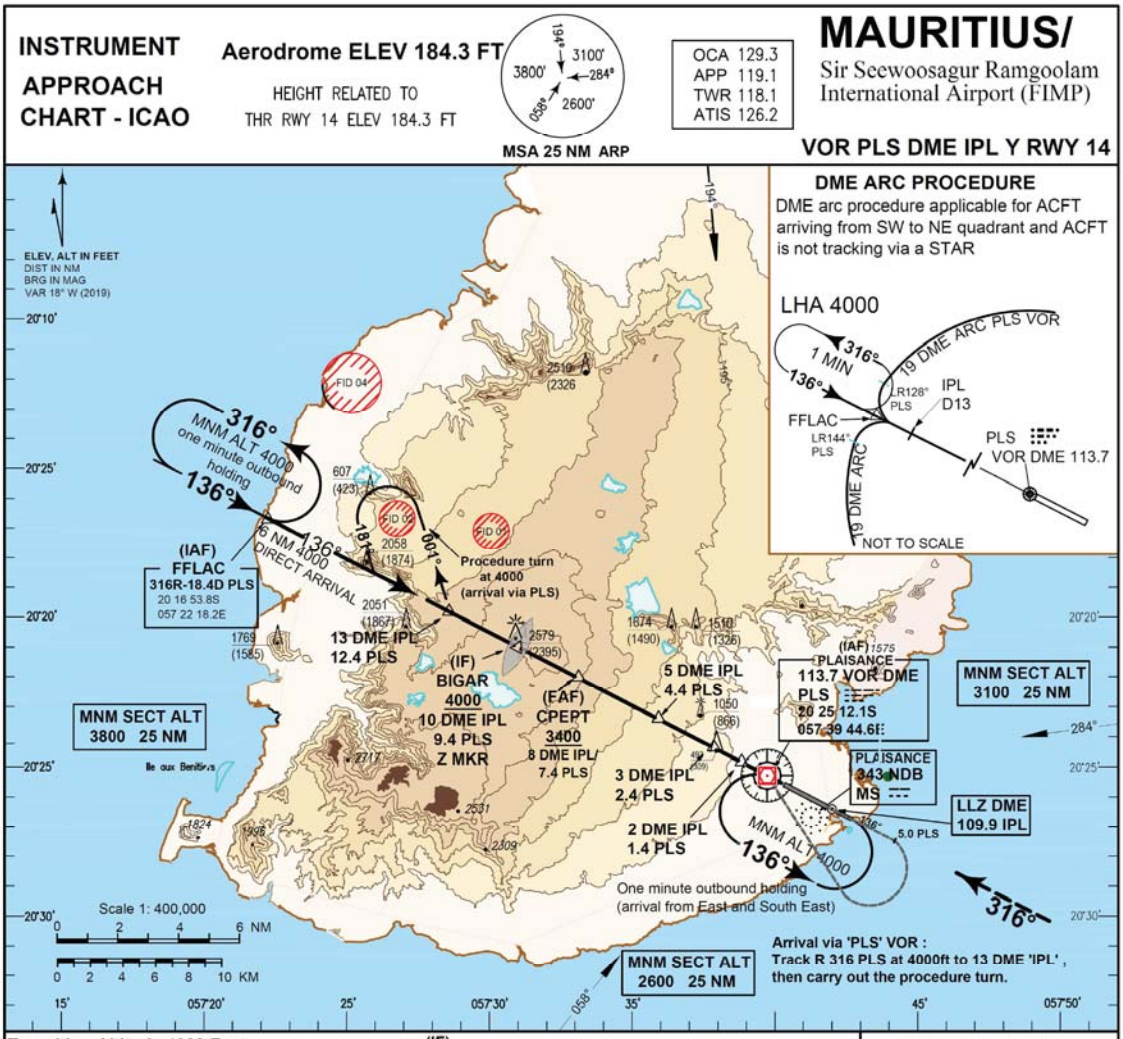

DESCENT GRADIENT 6.5%	RECOMMENDED ALTITUDES						
IPL DME	8	6	5	4	3	2	1
PLS DME	7.4	5.4	4.4	3.4	2.4	1.4	0.4
ALTITUDES	3400 (3216)	2610 (2426)	2210 (2026)	1820 (1636)	1420 (1236)	1030 (846)	630 (446)

CAT of ACFT	A	B	C	D	Ground Speed (Kt)		90	110	130	150	180	210
OCA /H	**860** (676)	**860** (676)	**860** (676)	**860** (676)	BIGAR - CPEPT	Rate of descent	450	550	650	750	900	1050
					CPEPT - THR14	Rate of descent	583	725	857	969	1187	1384

Notes:

1. **WARNING**
   VOR PLS indications should be used with integer distances from DME IPL which is paired with ILS (109.9 MHz CH 36X) and gives distances from threshold 14. Decimal distances from DME PLS (0.6 NM from threshold 14) should only be considered when DME indicator can display tenth of NM.
2. MAX IAS INITIAL 210KT.
3. VM (C) PROHIBITED NE OF RWY 14/32.

Changes: BIGAR is 4000, CPEPT is 3400, obstacle elevations 2058 and 1674, underlined numbers are AT or ABOVE altitudes concern Profile FFLAC is at 19nm from threshold in profile, inclusion of ZMKR at BIGAR instead of FAN MKR